

ServoWeldTM Actuators


SWA & SWB MODELS



INTEGRAL MOTOR HIGH THRUST ACTUATOR

ServoWeld SWA & SWB

Tolomatic is the world's leading manufacturer of integrated servo actuators for resistance spot welding, used by the world's top weld gun OEM's and numerous global vehicle manufacturers.



Superior Integrated Servo Motor Actuators

Tolomatic's ServoWeld family of integrated servo actuators are designed for best-in-class performance with the factors that are most important for resistance spot welding gun applications.

NUMBER OF WELDS/ PRODUCT LIFE

Tolomatic's superior roller screw design has the **highest dynamic load rating for more welds** than any competitive technology (other roller screws, ball screw, pneumatic).

FORCE REPEATABILITY

Skewed winding designed for welding minimizes motor cogging and **provides industry best actuator force repeatability:** • $\pm 3\%$ Over the Lifetime of the Actuator

EFFICIENCY

All elements of actuator (winding, screw, rod scraper, bearings) are designed to optimize the efficiency of the actuator system and provide the **most energy efficient solution on the market.**

WELDS/ MINUTE

All elements of the actuator (winding, screw, rod scraper, bearings) are designed to last and run as cool as possible in welding applications, with the ability to add water cooling as an option. This means **more welds per minute than any competitive technology** (other roller screws, ball screw, pneumatic).


WEIGHT

Tolomatic integrated servo actuators minimize weight when designed into the weldgun. Additionally, Tolomatic can customize actuators for a specific weldgun applications to provide **industry leading light weight designs.**


LIFETIME COST

By building the longest lasting, most efficient and highest weld per minute actuators on the market, Tolomatic actuators provide the **lowest total cost per spot weld.**


ServoWeld Applications

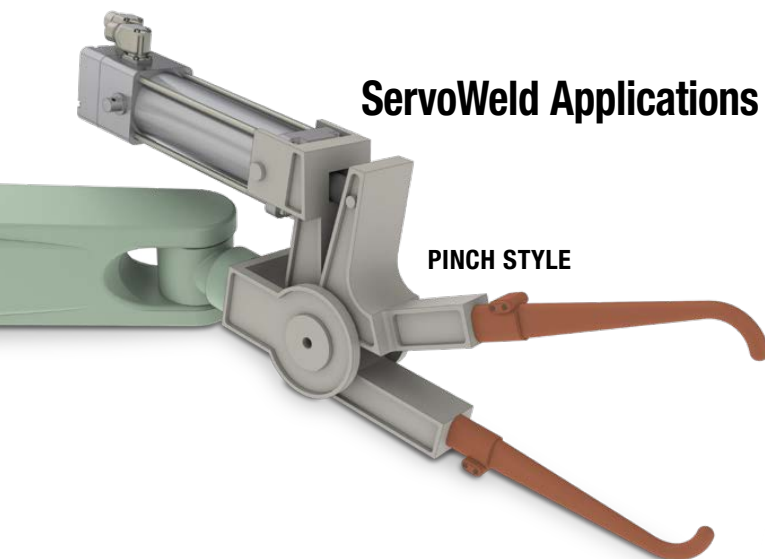

PINCH STYLE

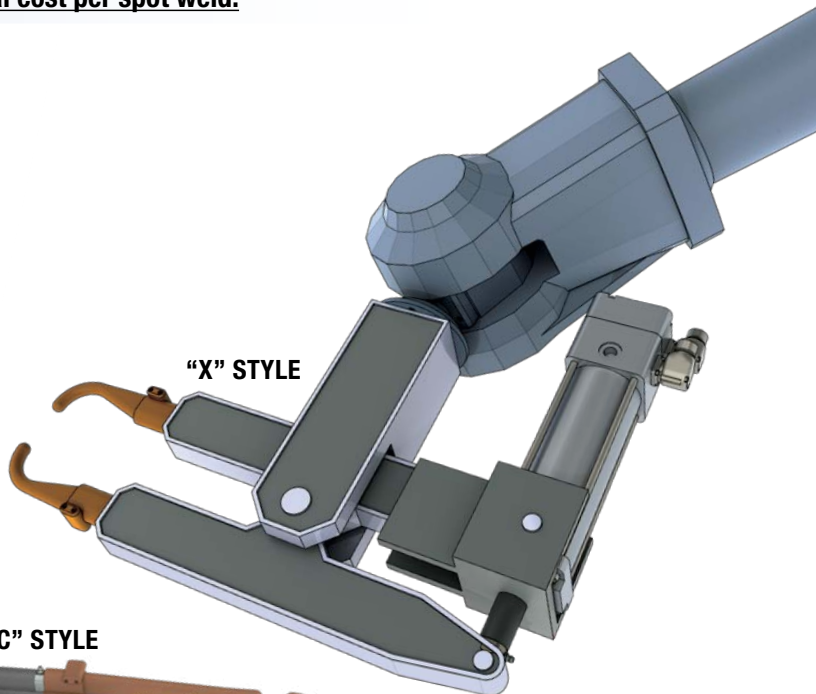


"X" STYLE

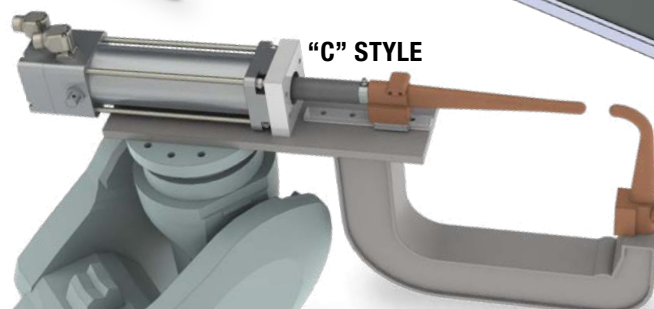




"C" STYLE

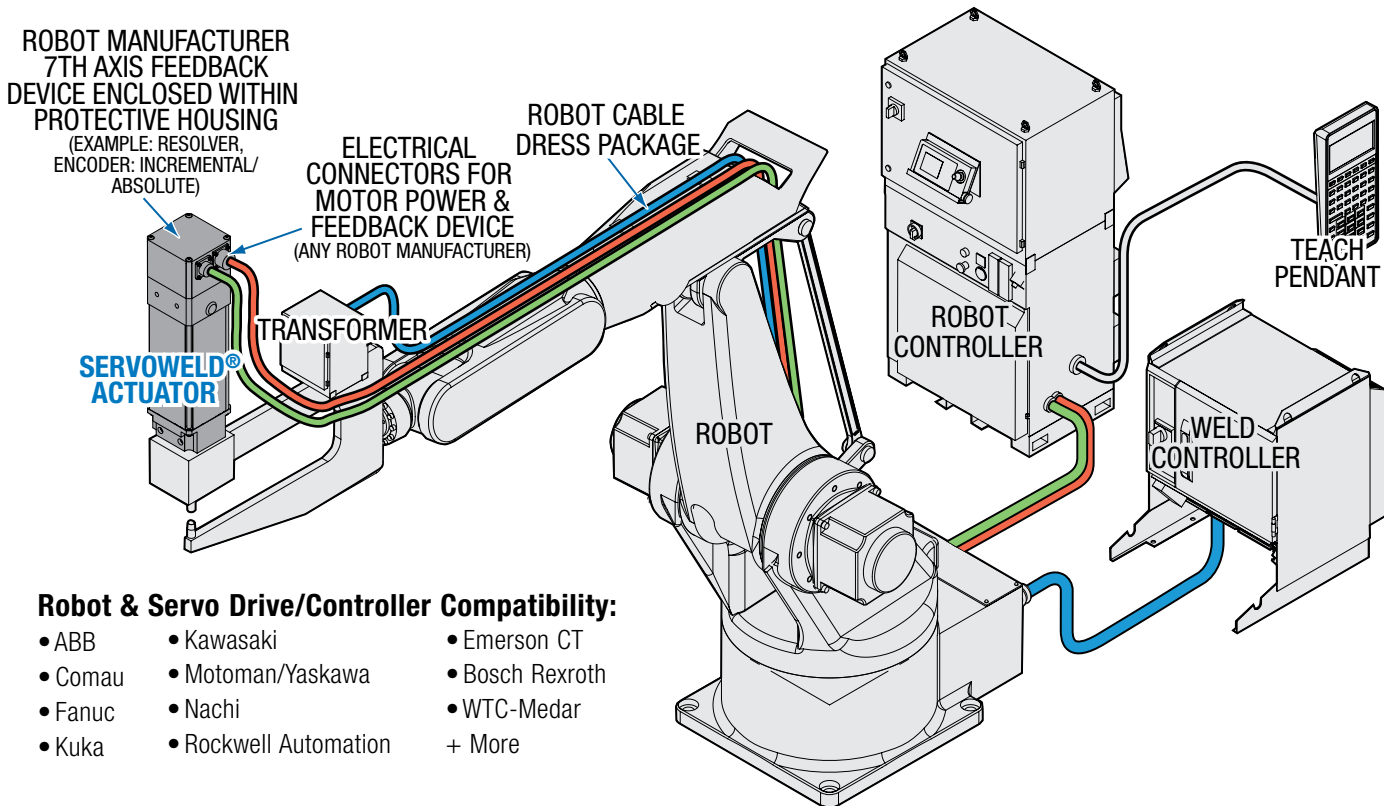Typical Robotic ServoWeld Installation



Tolomatic Offers the Broadest, Most Capable Family of Integrated Servo Actuators for Resistance Spot Welding

Model:	GSWA	SWA/SWB	CSWX
			
Number of Welds¹ (millions):	20 +	20 + (10+ SWB)	30+ (20+ CSW)
Re-lubrication without Disassembly:	Yes ⁴	Yes	Yes
Peak Force:	24.5 kN [5,500 lbf]	24.0 kN [5,395 lbf] SWA 22.0 kN [4,950 lbf] SWB	18.0 kN [4,047 lbf] CSW/X 15.6 kN [3,500 lbf] CSW
Actuator Output Force² (Lifetime) Repeatability:	± 3 %	± 3 % (± 5 % SWB)	± 3 %
Weight (size 33, 3)³ (size 44, 4)³:	8.3 kg [18.3 lb] 13.8 kg [30.4 lb]	7.2 kg [15.9 lb] 14.2 kg [31.2 lb]	min: 10.2 kg [22.6 lb]
Water Cooling:	Optional	Optional	Optional
Manual Override:	Optional	No	Optional
Full Force Direction:	Push and Pull	Push	Push and Pull

¹Based on properly lubricated ServoWeld unit used as recommended in user manual. Weld schedule, tip force, environment and lubrication are factors in the total number of welds achievable with ServoWeld actuators.

²At weld force

³ Weight varies with choice of feedback device and mounting options

⁴ Some exceptions, see GSWA user manual

SWA & SWB INTEGRATED MOTOR ACTUATOR

ENDURANCE TECHNOLOGYSM

A Tolomatic Design Principle

Endurance Technology features are designed for maximum durability to provide extended service life.

MULTIPLE MOTOR WINDINGS

YOU CAN CHOOSE:

- 460VAC or 230VAC rated windings potted directly into actuator housing
- Integral thermal switch for over temperature protection

ROBUST BUSHINGS

Supports the thrust tube and nut assembly through entire stroke length

WATER SLOTS

Allows for water to flow away from thrust rod to prevent ingress into the actuator

THRUST TUBE

- Steel thrust tube supports extremely high force capabilities
- Salt bath nitride treatment provides excellent corrosion resistance, surface hardness and is very resistant to adherence of weld slag, water and other potential contaminants

GREASE PORT

- Screw re-lubrication system provides extended screw life
- Convenient lubrication without disassembly

THREADED ROD END

- Zinc plated steel construction for corrosion resistance
- Provides a common interface to multiple rod end options

INTERNAL BUMPERS

Bumpers protect the screw and nut assembly from damage at end of stroke

ROD WIPER WITH SCRAPER

Prevents contaminants from entering the actuator for extended life

UNIVERSAL MOUNTING

Tapped holes in front face allow for mounting in any orientation ... 0°, 90°, 180° or 270°

SKEWED MOTOR WINDINGS

Skewed motor windings provide minimal torque ripple for force repeatability and smooth linear motion

ROBOT & DRIVE/CONTROLLER COMPATIBILITY

Compatible feedback, connector(s) and wiring to match the following robot & drive/controller manufacturers' cable dress packages

YOUR CHOICE:

- + ABB
- + Comau
- + Fanuc
- + Kawasaki
- + Kuka
- + Motoman/Yaskawa
- + Nachi
- + Rockwell Automation
- + Bosch-Rexroth
- + Emerson CT
- + WTC-Medar
- & more

FEEDBACK CHOICES

- Customer specified to robot manufacturer
- Multi-turn absolute encoder
- Resolver
- Digital encoder

WATER COOLING



- Option that is attached to any side of the actuator
- Allows increased duty cycle and increased jobs/hour

HIGH THRUST BEARING

Provides complete support of screw and protects the feedback device from linear forces

IP65

IP65 rating protects actuator from ingress of water, weld slag and other debris (static)

ADVANCED SCREW TECHNOLOGY

- Roller screws provide the highest thrust and life ratings available

- SWA: Highest DLR roller screw provides longest life

- SWB: Lower DLR roller screw, provides longer life than ball screws or inverted roller screws



OPTIONS




BRAKE

WATER COOLING

REAR TRUNNION MOUNTING

ServoWeld SWA & SWB - Integrated Motor Actuator

Table 1: Performance & Mechanical Specifications:

SERIES		SWA3 or SWB3			SWA4 or SWB4									
FRAME SIZE	mm	90.0			110.0									
	in	3.54			4.33									
MOTOR WINDING		A3 / B3			A2 / B2		A3 / B3				A4 / B4			
NUT/SCREW		RN04	RN05	RN10	RN05	RN10	RN04	RN05	RN05XR	RN10	RN04	RN05	RN05XR	RN10
§ SCREW LEAD	mm	4.0	5.0	10.0	5.0	10.0	4.0	5.0	5.0	10.0	4.0	5.0	5.0	10.0
PEAK FORCE	kN	11.1	11.1	5.8	14.5 / 12.8	7.3 / 6.4	17.8	14.7	22.1	11.1	17.8	14.7	24.0	17.8
	lbf	2500	2500	1306	3261/2882	1630/1441	4000	3300	4958	2500	4000	3300	5395	4000
MAX. VELOCITY	mm/sec	234	292	584	292	584	234	292	292	584	234	292	292	584
	in/sec	9.2	11.5	23.0	11.5	23.0	9.2	11.5	11.5	23.0	9.2	11.5	11.5	23.0
SWA SCREW DLR (DYNAMIC LOAD RATING)	kN	41.1	53.6	47.2	73.3	76.4	67.2	73.3	91.74	76.4	67.2	73.3	91.7	76.4
	lbf	9240	12050	10611	16479	17175	15107	16479	20624	17175	15107	16479	20624	17175
SWB SCREW DLR (DYNAMIC LOAD RATING)	kN	24.25	31.63	27.85	43.25	45.07	39.65	43.25	–	45.07	39.65	43.25	–	45.07
	lbf	5452	7110	6260	9723	10133	8913	9723	–	10133	8913	9723	–	10133
NOMINAL BACK DRIVE FORCE	N	436	347	173	405	205	507	405	405	205	507	405	405	205
	lbf	98	78	39	91	46	114	91	91	46	114	91	91	46
WEIGHT*	kg	7.80	7.80	7.80	11.25	11.25	12.29	12.29	12.29	12.29	14.16	14.16	14.16	14.16
	lbf	17.2	17.2	17.2	24.8	24.8	27.1	27.1	27.1	27.1	31.2	31.2	31.2	31.2
STROKE	mm	150	150	150	150	150	150	150	150	150	150	150	150	150
	in	6	6	6	6	6	6	6	6	6	6	6	6	6
BASE INERTIA	kg-cm ²	4.8997	4.8997	4.8997	8.1108	8.1108	9.7864	9.7864	9.7864	9.7864	11.4073	11.4073	11.4073	11.4073
	lb-in	1.6723	1.6723	1.6723	2.7716	2.7716	3.3442	3.3442	3.3442	3.3442	3.8966	3.8966	3.8966	3.8966
AMBIENT TEMP ** RANGE	°C	0 to 50												
	°F	32 to 122												
IP RATING		Standard IP65 (static)												
AGENCY LISTINGS		  												

*Weight varies per feedback device or mounting option. See table below for details.

**From 0-10°C (32-50°F), additional startup procedure may be required for optimal performance. See user manual for details.

§NOTE: Screw/Lead Accuracy: 0.023 mm/300 mm; 0.0009 in/ft

Table 2:

Table 2:		Weight Adder						
		Water Cooling	Rear Trunnion	FEEDBACK OPTION				
				F1	F2	A1	K1***	W1
SW_3	kg	0.36	0.10	0.3	0.77	0.59	1.27	1.03
	lb	0.80	0.22	0.65	1.70	1.30	2.80	2.26
SW_4	kg	0.52	0.24	0.3	0.48	0.64	1.34	0.72
	lb	1.15	0.52	0.65	1.05	1.41	2.96	1.59

***Weight adder for K1 option includes weight of brake


ServoWeld SWA & SWB - Integrated Motor Actuator

Table 3: Motor Specifications:


SERIES			SW_3		SW_4					
MOTOR WINDING			A3	B3	A2	B2	A3	B3	A4	B4
TORQUE CONSTANT (K _t)		N-m/A Peak	0.62	1.21	0.52	0.90	0.61	1.20	0.64	1.29
		in-lb/A Peak	5.5	10.7	4.6	8.0	5.4	10.6	5.7	11.4
VOLTAGE CONSTANT (K _e)		V/Krpm Peak	79.8	154	66.1	107.2	78.1	153.1	81.1	162.3
CONTINUOUS STALL TORQUE	No Water Cooling	N-m	4.4	4.3	5.5	4.9	8.4	8.5	14.6	14.6
		in-lb	39	38	48.8	43.0	74	75	129	129
	With Water Cooling	N-m	8.8	8.6	11.0	9.7	16.7	17.0	20.8	20.8
		in-lb	78	76	97.6	86	148	150	184	184
CONTINUOUS STALL CURRENT	No Water Cooling	A _{RMS}	5	2.5	7.5	3.8	9.7	5.0	16	8
	With Water Cooling	A _{RMS}	10.0	5.0	15.0	7.6	19.4	10.0	23	12
PEAK TORQUE		N-m	13.2	12.9	16.5	14.6	25.1	25.4	43.7	43.7
		in-lb	117	114	146	129	222	225	387	387
PEAK CURRENT		A _{RMS}	15	7.5	22.5	11.4	29.1	15.0	48	24
RESISTANCE		Ohms	2.07	8.3	0.9	4.2	0.58	2.32	0.36	1.46
INDUCTANCE		mH	3.8	15	9.7	15.7	2.75	11.5	2.04	12.11
NO. OF POLES			8							
BUS VOLTAGE		V _{RMS}	230	460	230	460	230	460	230	460
SPEED @ RATED V		RPM	3,500							

SIDE LOADING

Some weld gun designs may subject the actuator to excessive side loading reducing overall service life. Measures are required, especially in "C" style designs, to limit side loading. For life optimization Tolomatic recommends side loads of less than 5% of axial load (thrust rod output force) for all roller screw configurations.




SW_ SIDE LOAD SPECIFICATIONS at 150 mm (6 in)

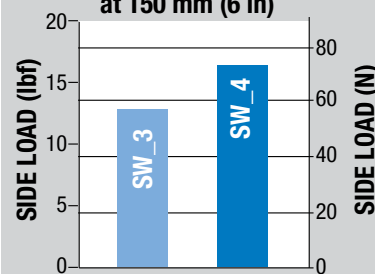

MOTOR WINDING

A4
B4 = 4 Stack Motor



A3
B3 = 3 Stack Motor



A2
B2 = 2 Stack Motor




Table 4: Brake Specifications:

	SERIES	SW_3	SW_4
ROTOR INERTIA	gm-cm ²	73	239
	oz-in ²	0.400	1.307
CURRENT	Amp	0.43	0.67
HOLDING TORQUE	N-m	4.0	10.0
	in-lb	35	89
ENGAGE TIME	mSec	40	25
DISENGAGE TIME	mSec	50	50
VOLTAGE	Vdc	24	24

BRAKE CONSIDERATIONS

In all vertical application an un-powered SWA will require a brake to maintain position. Tolomatic recommends that the nominal back drive force specification (listed in Table 1) be used for reference only. Back drive force is subject to change throughout the life of the actuator, due to mechanical break in, ambient temperature, and duty cycle variation.

A brake can be used with the actuator to keep it from backdriving, typically in vertical applications. A brake may be used for safety reasons or for energy savings allowing the actuator to hold position when un-powered.

NOTE: The optional Spring-Applied / Electronically-Released Brake requires 24V power.




Brake will increase actuator length and weight, see Table 2 (K1).

SWA & SWB Dimensions

3D CAD available from Tolomatic
Always use configured CAD solid model
to determine critical dimensions



Table 5: Dimensions

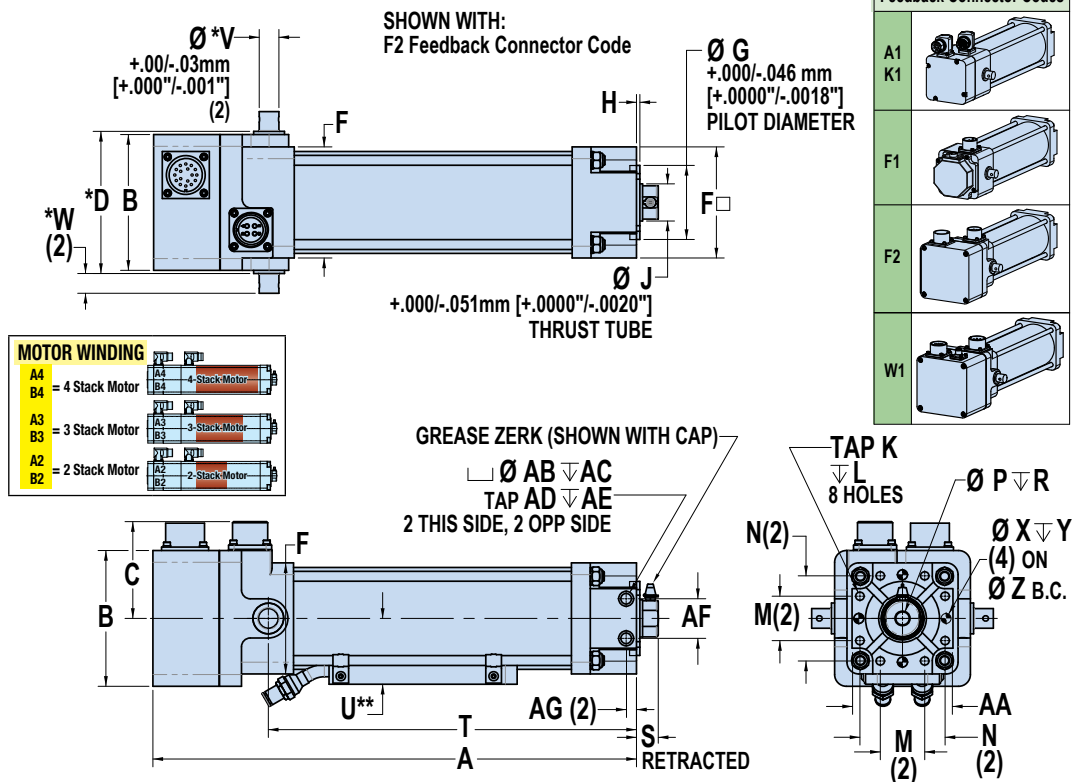

	SW_3	SW_4
F	90.0	110.0
G	60.000	64.500
H	2.8	3.4
J	30.135	34.926
K	M8 x 1.25	M8 x 1.25
L	16.0	13.0
M	36.0	29.072
N	69.0	79.874
P	M12 x 1.25	M20 x 1.5
R	22.2	25.9
S	17.6	19.1
T	273.0	321.0
U**	53.3	66.7
V*	15.98	20.0
W*	16.0	20.1
X	—	8.052/8.026
Y	—	12.7
Z	—	85.00
AA	—	94.01/93.95
AB	—	12.09/12.04
AC	—	6.00
AD	—	M10 x 1.5
AE	—	16.00
AF	—	50.00
AG	—	15.00

*for Trunnion Option

**for Water Cooling Option
Dimensions in millimeters

Motor Winding	Feedback	SW_3					SW_4				
		A1	F1	F2	K1	W1	A1	F1	F2	K1	W1
A,B 2,3	w/o Brake	350.5	343.5	366.5	**	387.3	402.9	395.4	418.0	**	439.3
A,B 2,3	w/ Brake	373.9	375.5	**	377.7	401.6	427.1	433.9	**	422.2	453.5
A,B 4	w/o Brake	—	—	—	—	—	410.7	403.2	425.8	**	447.1
A,B 4	w/ Brake	—	—	—	—	—	434.9	441.7	**	423.3	461.3
B		90.0	90.0	110.0	90.0	110.0	110.0	110.0	110.0	110.0	110.0
C		85.3	71.6	78.4	86.4	78.0	94.1	78.4	78.4	96.4	78.0
D*		95.2	95.2	123.0	95.2	123.0	123.0	123.0	123.0	123.0	123.0
Feedback Connector Code/Type		A1 SWIVEL	F1 BOX	F2 BOX	K1 SWIVEL	W1 BOX	A1 SWIVEL	F1 BOX	F2 BOX	K1 SWIVEL	W1 BOX

*for Trunnion Option **Contact Tolomatic for additional information Dimensions in millimeters

Motor Winding	Feedback	SW_3					SW_4				
		A1	F1	F2	K1	W1	A1	F1	F2	K1	W1
A,B 2,3	w/o Brake	13.80	13.52	14.43	**	15.25	15.86	15.57	16.46	**	17.29
A,B 2,3	w/ Brake	14.72	14.78	**	14.87	15.81	16.81	17.08	**	16.62	17.85
A,B 4	w/o Brake	—	—	—	—	—	16.17	15.87	16.76	**	17.60
A,B 4	w/ Brake	—	—	—	—	—	17.12	17.39	**	16.67	18.16
B		3.54	3.54	4.33	3.54	4.33	4.33	4.33	4.33	4.33	4.33
C		3.36	2.82	3.09	3.40	3.07	3.71	3.09	3.09	3.80	3.07
D*		3.75	3.75	4.84	3.75	4.84	4.84	4.84	4.84	4.84	4.84
Feedback Connector Code/Type		A1 SWIVEL	F1 BOX	F2 BOX	K1 SWIVEL	W1 BOX	A1 SWIVEL	F1 BOX	F2 BOX	K1 SWIVEL	W1 BOX

*for Trunnion Option **Contact Tolomatic for additional information Dimensions in inches

	SW_3	SW_4
F	3.54	4.33
G	2.3622	2.5394
H	0.11	0.13
J	1.1864	1.3750
K	M8 x 1.25	M8 x 1.25
L	0.63	0.51
M	1.42	1.1446
N	2.72	3.1446
P	M12 x 1.25	M20 x 1.5
R	0.88	1.02
S	0.69	0.75
T	10.75	12.64
U**	2.10	2.63
V*	0.629	0.787
W*	0.63	0.79
X	—	0.3170/0.3160
Y	—	0.50
Z	—	3.346
AA	—	3.701/3.699
AB	—	0.476/0.474
AC	—	0.236
AD	—	M10 x 1.5
AE	—	0.630
AF	—	1.969
AG	—	0.591

*for Trunnion Option


**for Water Cooling Option
Dimensions in inches

Complete Verification Testing is Performed on Every Actuator

Every ServoWeld actuator has to pass rigorous testing at our factory. With this extra quality step we provide peace of mind to our customers and enable them to start their production faster, worry free!



Functional unit testing for hundreds of cycles quantifies stroke, length, torque under no load, input current vs force standard deviation.

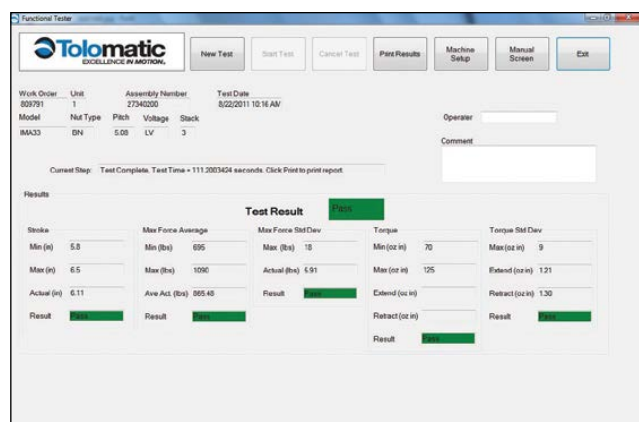

Testing parameter results in progress for the Functional Test procedure.



Final system test ensures the feedback device is properly aligned with the ServoWeld motor poles.

We verify the performance of each individual unit before delivery to ensure they conform to Tolomatic's high standard of performance.

1. High POT (High Potential/High Voltage Test)

This standard electric motor test procedure is a 3-part test that checks the insulation system of the assembly to verify proper armature and thermal wire insulation.

2. Electronic phasing of ServoWeld® and feedback device (Encoder, Resolver, Feedback Device)

Using a fixed current and a specially designed fixture the feedback device is physically and electronically aligned relative to the phasing of the ServoWeld motor.

3. Functional Testing

Performed with Tolomatic motion control components and dedicated data acquisition equipment. Operated for hundred of cycles, this test quantifies these parameters - stroke length, torque under no load, input current vs force average, input current vs force standard deviation - using an electronic load cell in conjunction with data acquisition equipment.

4. Tolomatic System Test

Using a single-axis control unit the test ensures that the feedback device is properly aligned with the poles of the ServoWeld motor.

ServoWeld Application Guidelines

SIDE LOADING: Some weld gun designs may subject the actuator to excessive side loading, reducing overall service life. The GSWA33, GUIDED actuator will accommodate side loading. For other ServoWeld configurations, measures are required, especially in “C” style designs, to limit side loading. For life optimization Tolomatic recommends side loads of less than 5% of axial load (thrust rod output force) for all roller screw configurations and less than 1% of axial load for all ball screw configurations.

For maximum service life, external guiding is recommended to minimize side loading to the thrust rod and provide consist weld gun movable tip/fixed tip alignment throughout service life.

THRUST ROD WIPER/SCRAPER: The thrust rod wiper/scrapper assembly is field replaceable. For maximum service life, measures should be taken to reduce/eliminate contamination, weld slag, and water in the thrust rod wiper/scrapper interface area. Implementation of industrial thrust rod boot and/or deflective device can be effectively utilized in this area.

CABLES: Shielded power & feedback cables are recommended to minimize electrical noise/grounding issues. Electrical noise or inadequate grounding can corrupt the feedback device signal.

RSW SERVO SYSTEM CALIBRATION: RSW weld gun servo system consists of robot 7th axis amplifier, robot feedback device, robot RSW software, weld gun chassis, & ServoWeld.

For optimal RSW weld gun servo system performance the calibration process should include maximum weld tip force from the production weld schedule, tip dress force, and multiple weld tip forces in-between. Utilizing all the available robot manufacturer force table inputs will provide best RSW weld gun servo system performance. The same weld tip part contact speed should be used for both RSW weld gun servo system calibration and production weld schedule.

WELD TIP/PART CONTACT SPEED: Tolomatic testing confirms the highest ServoWeld repeatability (**INPUT CURRENT** verses **OUTPUT FORCE**) at a weld tip part contact speed of 25mm/second or less. Speeds greater than 25mm/second can create “impact contribution” to the weld force. This impact contribution to the weld force deteriorates prior to completion of the weld cycle.

ROBOT CARRIED APPLICATIONS: Robot carried RSW gun applications have reduced exposure to water pooling/water ingress by virtue of the continuous robot movement and various RSW gun positions. In addition, in robot carried applications positioning of the RSW gun can be programmed as part of the weld cap change program/routine to eliminate ServoWeld exposure to water. (ServoWeld above weld caps)

ROBOT MANUFACTURER SERVO FILE: Robot manufacturer servo parameter files for operation of ServoWeld are available only from the robot manufacturer. Each robot manufacturer creates 3rd party motor servo parameter files, validates operation of ServoWeld via their 7th axis, and maintains servo motor parameter file for operation of ServoWeld.

TOOL CHANGER APPLICATIONS: Weld gun storage fixture in cell should position weld gun so movable electrode is not loading ServoWeld thrust rod - back driving the ServoWeld. Weld gun tips should be positioned to weld gun closed at low force prior to disconnect from robot/tool changer. Consider ServoWeld configured with integral brake option.

FIXED / PEDESTAL APPLICATIONS: One of the more challenging RSW applications is a pedestal RSW gun, ServoWeld mounted vertical – thrust rod up. Measures should be taken to reduce and/or eliminate the ServoWeld to water exposure, water pooling/spray in the access areas of the ServoWeld unit to maximize overall service life.

- Pedestal RSW guns that can be mounted with the ServoWeld vertical – thrust rod down should be considered.
- Pedestal RSW guns that must be mounted with the ServoWeld vertical – thrust rod up should be mounted at an angle of a least 10 – 15° to minimize water pooling.
- Water channels on interfacing mounting components of the ServoWeld/RSW Gun to minimize water pooling
- Any RSW gun applications that are suspect for water exposure should utilize an external deflector (bib) or a thrust rod boot to keep the water away from the thrust rod wiper/scrapper interface area.
- Any RSW gun application that is suspect for water exposure should consider utilizing a manual shut-off valve in the water saver circuit at the RSW gun. Shutting off the water prior to weld cap change can significantly reduce water exposure issues in the RSW gun environment.
- Pedestal RSW gun applications should have the mating electrical connectors (90 degree) on the cable dress package facing down with the cable dress cables looped to reduce water ingress via the electrical connectors (power/feedback).
- Allow adequate cable length so the cables are not in tension.
- Molded mating electrical connectors on the cable dress package for pedestal RSW gun applications
- Confirming full engagement of the cable dress connector to the appropriate mating receptacle on ServoWeld.

ServoWeld SWA & SWB Integrated Motor Actuators

Ordering

MODEL SELECTION (MUST BE IN THIS ORDER)

S W A 4 A 1 A 3 R 1 B 1 A 1 X 2 A

MODEL	
SWA	ServoWeld Advanced
SWB	ServoWeld Base

SIZE	
3	3 Series Actuator
4	4 Series Actuator

STROKE LENGTH	
A	150mm (6") Stroke
X	Special

SCREW LEAD		
Screw/Nut combinations available		
Code	Screw	Description
1	RN05	Roller Nut, 5 mm lead
2	RN10	Roller Nut, 10 mm lead
3	RN04	Roller Nut, 4 mm lead
5	RN05 XR	Roller Nut, 5 mm lead, XR

MOTOR VOLTAGE	
A2	230 Vac, Motor Voltage, 2 Stack Winding
B2	460 Vac, Motor Voltage, 2 Stack Winding
A3	230 Vac, Motor Voltage, 3 Stack Winding
B3	460 Vac, Motor Voltage, 3 Stack Winding
A4	230 Vac, Motor Voltage, 4 Stack Winding
B4	460 Vac, Motor Voltage, 4 Stack Winding

FEEDBACK, CONNECTOR, WIRING	
A1	ABB Resolver
C1	Comau Resolver
F1	Fanuc a128
F2	Fanuc a64
K1	Kuka Resolver
M1	Motoman Absolute
N1	Nachi Absolute FD11 Series
W1	Kawasaki Absolute E Series
XX	Special

FEEDBACK SUPPLIED BY:	
A	Customer
B	Tolomatic

BRAKE OPTION	
1	NO Brake
2	Brake

MOUNTING OPTIONS	
A1	Front Face
T1	Rear Trunnion
XX	Special

ROD END OPTIONS	
A	Standard , Metric internal, threaded rod end
X	Special

WATER COOLING	
1	NO Water Cooling
2	Water Cooling, Bottom, 10mm tube fitting
X	Special

SPECIAL OPTIONS	
A	No Special Options
X	Special

! Not all codes listed are compatible with all options.

Call Tolomatic 1-800-328-2174 to determine available options and accessories based on your application requirements.

The Tolomatic Difference Expect More From the Industry Leader:



INNOVATIVE PRODUCTS

Unique linear actuator solutions with Endurance TechnologySM to solve your challenging application requirements.



FAST DELIVERY

The fastest delivery of catalog products... Built-to-order with configurable stroke lengths and flexible mounting options.



ACTUATOR SIZING

Online sizing that is easy to use, accurate and always up-to-date. Find a Tolomatic electric actuator to meet your requirements.




YOUR MOTOR HERE

Match your motor with compatible mounting plates that ship with any Tolomatic electric actuator.




LIBRARY

Easy to access CAD files available in the most popular formats to place directly into your assembly.



TECHNICAL SUPPORT

Extensive motion control knowledge: Expect prompt, courteous replies to any application and product questions from Tolomatic's industry experts.

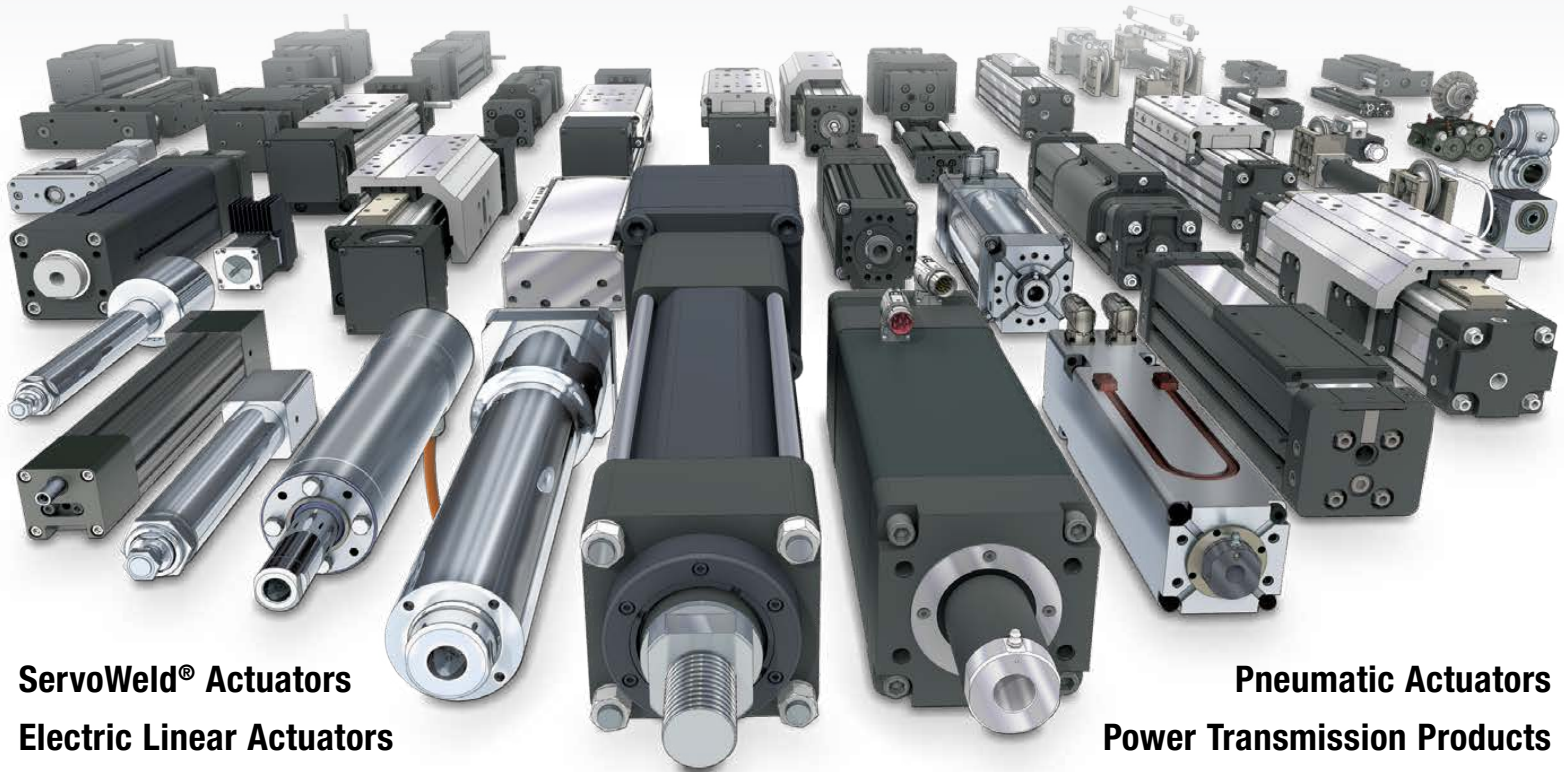

ServoWeld® Actuators
Electric Linear Actuators

Pneumatic Actuators
Power Transmission Products

TolomaticTM

EXCELLENCE *IN MOTION*

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =
Certified site: Hamel, MN

USA - Headquarters

Tolomatic Inc.
3800 County Road 116
Hamel, MN 55340, USA
Phone: (763) 478-8000
Toll-Free: **1-800-328-2174**
sales@tolomatic.com
www.tolomatic.com

MEXICO

Centro de Servicio
Parque Tecnológico Innovación
Int. 23, Lateral Estatal 431,
Santiago de Querétaro,
El Marqués, México, C.P. 76246
Phone: +1 (763) 478-8000
help@tolomatic.com

EUROPE

Tolomatic Europe GmbH
Elisabethenstr. 20
65428 Rüsselsheim
Germany
Phone: +49 6142 17604-0
help@tolomatic.eu

CHINA

**Tolomatic Automation Products
(Suzhou) Co. Ltd.**
No. 60 Chuangye Street, Building 2
Huqiu District, SND Suzhou
Jiangsu 215011 - P.R. China
Phone: +86 (512) 6750-8506
TolomaticChina@tolomatic.com

All brand and product names are trademarks or registered trademarks of their respective owners. Information in this document is believed accurate at time of printing. However, Tolomatic assumes no responsibility for its use or for any errors

that may appear in this document. Tolomatic reserves the right to change the design or operation of the equipment described herein and any associated motion products without notice. Information in this document is subject to change without notice.

Visit www.tolomatic.com for the most up-to-date technical information